


SPECIFICATIONS

Current Rate:1 Amp
 Insulation Resistance:5000 Megohms Min.At DC 500V
 Contact Resistance:20 Milliohms Max.At DC 100mA
 Operation Temperature:-55°C To +105°C
 Insulator:30% Glass Filled PBT UL 94V-0
 Contact:Brass,Gold Flash

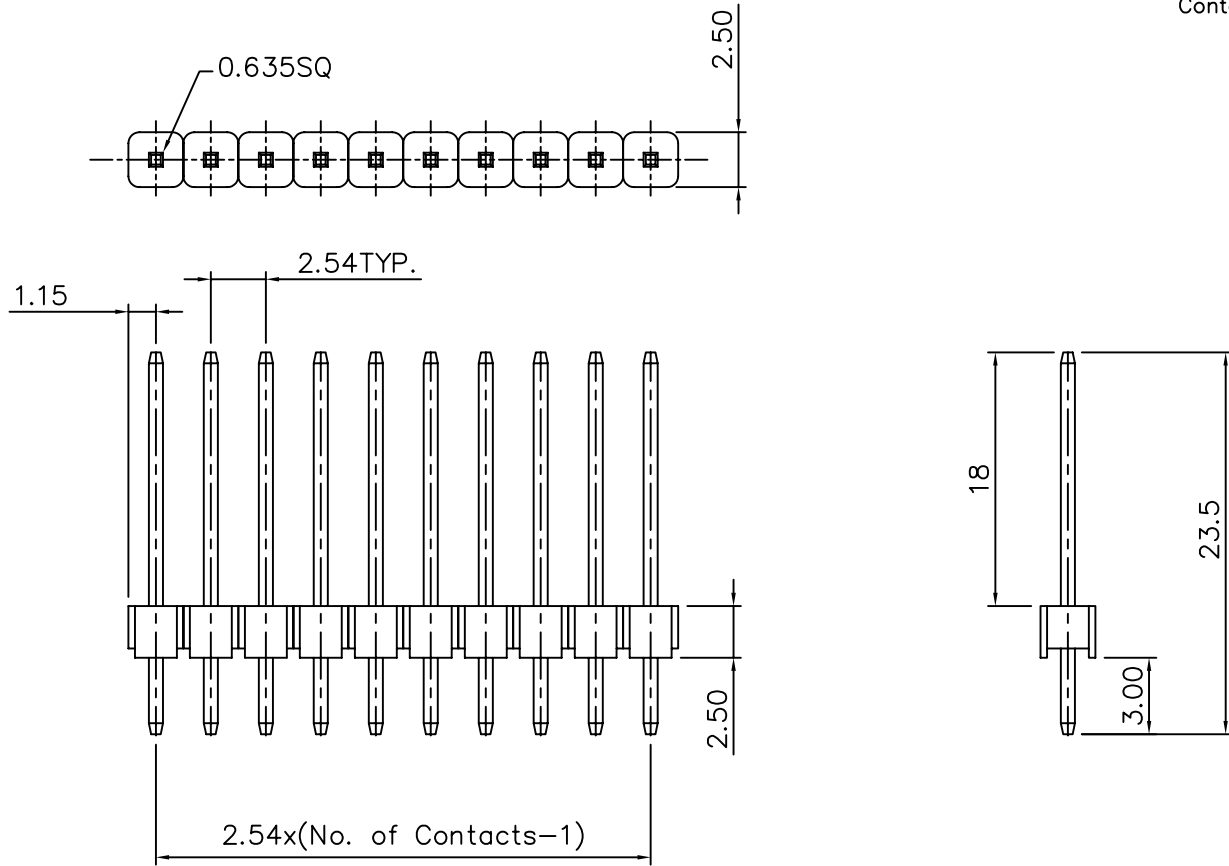

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 17938

APPROVED BY
 MEI
 CHECKED BY
 SHIN
 DRAWING BY
 YI

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 .XXX

SCALE NONE

REV. A0

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	SHIN	05/05/2006